


# AX1800 Wi-Fi 6 Range Extender

Boost your Wi-Fi



















Easy Setup Within Minutes

## Highlights

### Extend AX1800 Wi-Fi to Your Whole Home

Works with any Wi-Fi router to eliminate Wi-Fi dead zones, and blanket your home with stable, super-fast, seamless Wi-Fi via OneMesh™.

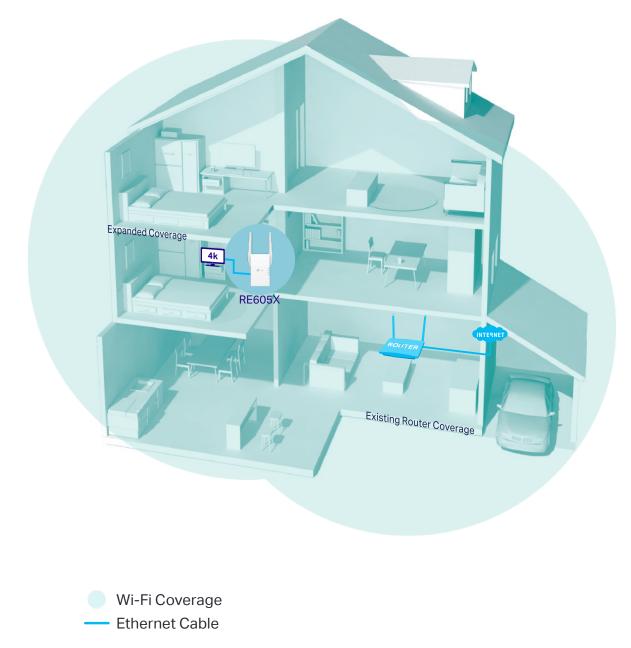



Turbocharge your devices with wireless speeds of up to 1.8 Gbps.



Larger Capacity<sup>Δ</sup> Wi-Fi 6 builds a more efficient network that increases the average throughput by 4 times and servers more devices.





#### Save Clients' Battery Power\*

Target Wake Time schedules the connection time of battery-powered devices to reduce their power consumption.



Keep your network running at top-speed by automatically choosing the fastest connection path to the router.



Create a new Wi-Fi access point to enhance your wired network with Wi-Fi capability.



Easy setup and management via WPS button/Tether app/Web UI.

#### Faster Wi-Fi 6 Speed

#### **Ultra-Low Latency**

Take advantage of ultra-low latency to enjoy smoother online experience.

#### Adaptive Path Selection

#### Access Point Mode

#### Easy Setup Within Minutes

## Highlights



RE605X is more than a traditional range extender. It creates a Mesh network by connecting to a OneMesh<sup>™</sup> router for seamless whole-home coverage.



#### Wi-Fi Dead-Zone Killer

Eliminate weak signal areas with Wi-Fi coverage for the whole house.



#### Uninterrupted Streaming<sup>§</sup>

Enjoy uninterrupted streaming, surfing, and more—even when moving around your home.



#### One Wi-Fi Name

Stay connected to the same network name in every room.



#### Unified Management

Push the WPS button to set up a Mesh network you can manage from the Tether app or web UI.



Check more info about OneMesh technology and full list of OneMesh extenders/routers at: https://www.tp-link.com/onemesh/re605x

\*More compatible devices coming soon

#### Wi-Fi 6 Range Extender





#### Secure One-touch Connection (WPS)

Instantly connect the extender to a router without inference configuration.

#### **Smart Signal Indicator**

See signal to find the best spot to extend Wi-Fi.


Strong signalWeak signal

#### **Gigabit Ethernet Port**

Plug in to give wired device network access, particularly ideal for high bandwidth consuming devices.



### Features

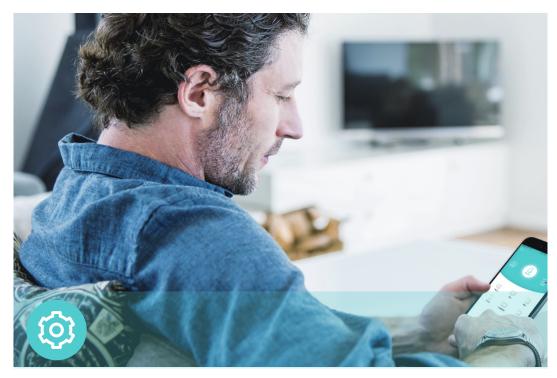



- Intuitive Web UI– Ensures quick and simple installation without hassle
- Fast Encryption One-touch wireless security encryption with the WPS button
- Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether App, available on any Android or iOS device
- Online Upgrade Keeps you informed of the latest firmware and allows online updating on the web UI



#### Speed

- Ultimate Wireless Speed Combined wireless speeds of up to 574 Mbps (over 2.4 GHz) and 1201 Mbps (over 5 GHz)<sup>†</sup>
  Simultaneous Dual Band – Separate Wi-Fi bands enable more devices to connect to your network without a drop in performance
- Support Wi-Fi 6 Turbocharge your devices with wireless speeds of up to 1.8 Gbps
- Adaptive Path Selection Keep your network running at top-speed by automatically choosing the fastest connection path to the router


### Reliability

- Reliable Connection Internal antennas for optimal Wi-Fi coverage and reliable wireless connections
- Ultra-Low Latency Take advantage of ultra-low latency to enjoy smoother online experience

## **Specifications**

#### Hardware

- · Button: WPS Button, Reset Button
- Port: 1 Gigabit Ethernet Port
- Antenna: 2 External Antennas
- Power Consumption: 13.5W
- Dimensions (W × D × H): 2.9×1.8×4.9 in. (74.0×46×124.8 mm)

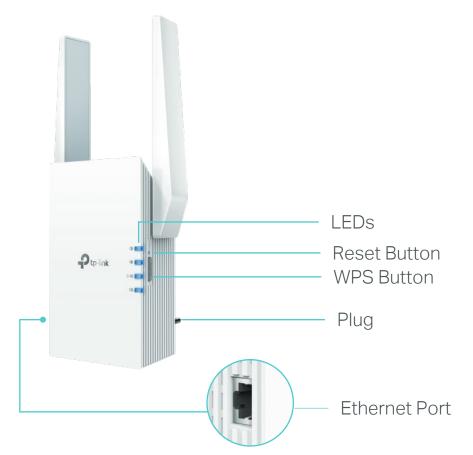

#### Wireless

- Wireless Standards: IEEE 802.11a/n/ac/ax 5 GHz, IEEE 802.11b/g/n/ax 2.4 GHz
- Frequency: 2.4 GHz and 5 GHz
- · Signal Rate: 574 Mbps at 2.4 GHz, 1201 Mbps at 5 GHz
- Transmit Power: CE: 2.4 GHz  $\leq$  20dBm, 5 GHz  $\leq$  23dBm (5.15 GHz ~ 5.35 GHz), 5 GHz ≤ 30dBm (5.45 GHz ~ 5.75 GHz)
- · Reception Sensitivity:
- 5 GHz:

11a 6Mbps: -97dBm, 11a 54Mbps: -78dBm

11ax HE20 MCS0: -97dBm, 11ax HE20 MCS11: -66dBm 11ax HE40 MCS0: -94dBm, 11ax HE40 MCS11: -62dBm 11ax HE80 MCS0: -91dBm, 11ax HE80 MCS11: -61dBm 2.4 GHz:

11g 6Mbps: -96dBm, 11g 54Mbps: -78dBm

11ax HE20 MCS0: -95dBm, 11ax HE20 MCS11: -66dBm 11ax HE40 MCS0: -93dBm, 11ax HE40 MCS11: -62dBm

- · Wireless Function: Enable/Disable Wireless Radio, Wireless Statistics
- Wireless Security: WPA, WPA2, WPA3



#### For more information, please visit

https://www.tp-link.com/home-networking/range-extender/re605x/

#### or scan the QR code left

©2022 TP-Link

<sup>+</sup>The product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or is non-standard or outdated.

<sup>§</sup>Uninterrupted Streaming is designed for devices that support the 802.11k/v standard.

<sup>a</sup>Up to 4x Capacity refers to 4x increase in median throughput under dense environment compared to 11ac wave 2 range extender

\*Saving clients' battery power requires clients to also support the 802.11ax Wi-Fi standard. Actual power reduction may vary as a result of network conditions, client limitations, and environmental factors.

#### Others

Certification

CE, RoHS

System Requirements

Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1, 10, MAC OS, NetWare, UNIX or Linux

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser

Package Contents

Wi-Fi Range Extender RE605X

Quick Installation Guide

www.tp-link.com TP-Link AX1800 Wi-Fi 6 Range Extender RE605X

<sup>&</sup>lt;sup>†</sup>Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.